

PRODUCT INFORMATION

FL-UFOH HO LED High Bays (100–150 W)

www.finlight.fi

FL-UFOH



Type: LED High Bay (IP65)

Installation: Suspended mounting with the installation loop (standard) or surface mounting with "U" bracket (accessory)

Application: Shopping centers, warehouses, sport facilities, factories and similar places



Product Name	Dimensions (mm)	Power (W)	Luminous Flux (+/- 10 %)	Energy Efficiency	Weight (kg)
FL-UFOH HO 100W	Ø500x301	100	17 000 lm(@ 4000 K)	170 lm/W	4,8
FL-UFOH HO 120W	Ø500x301	120	20 400 lm(@ 4000 K)	170 lm/W	4,8
FL-UFOH HO 150W	Ø500x301	150	25 500 lm(@ 4000 K)	170 lm/W	4,8

MATERIALS

Body: Aluminium

Lens: Glass

DEGREE OF PROTECTION (IP)

IP65

INFORMATION/INSTALLATION

Light Distributionfiles available: Yes

Installation: Suspended mounting with the installation loop (standardvaruste) / Surface U bracket (accessory)

Operating environment: -30 °C – +50 °C (10 % – 90 % RH)

Warranty: 5–7 years

LIGHT SOURCE

Ra/CRI (Color Rendering Index): >80

Lifespan: 100 000h (L75/B50)

PF: > 0,95

Beam angle: 90° (~110° without shade)

LUMILEDS 3030

TEHNICAL PRODUCT INFORMATION

Color Temperature Options: 4000 K / 5000 K / 5700 K (varastotuote 4000 K)

Input Voltage: 220–240VAC 50–60Hz

PRODUCT ORDER CODES

FL-UFOH HO 100W, FL-UFOH HO 120W, FL-UFOH HO 150W

PRODUCT IMAGES

FL-UFOH HO LED High Bays (100–150 W)

www.finlight.fi

FL-UFOH



UFOH HO 100-150W



LIGHT DISTRIBUTION


FL-UFOH HO LED High Bays (100–150 W)

www.finlight.fi

FL-UFOH




90° varjostin

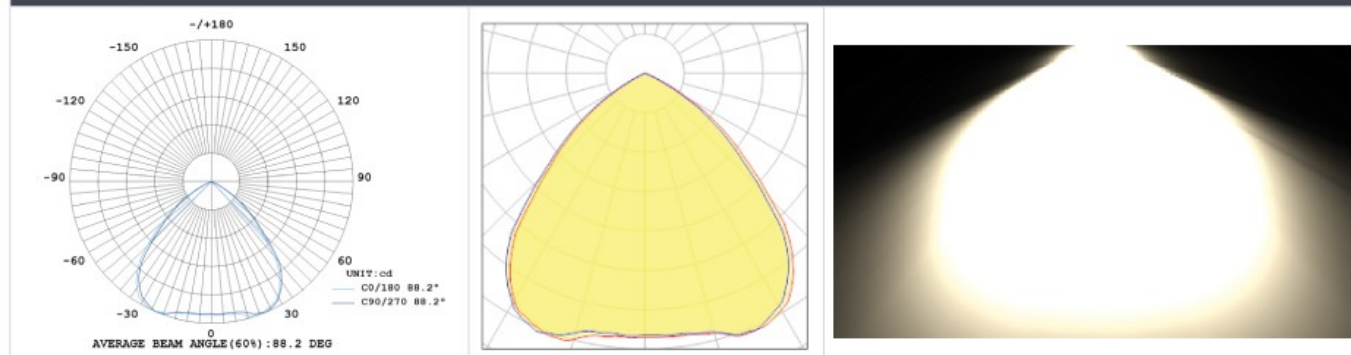

90D

110°

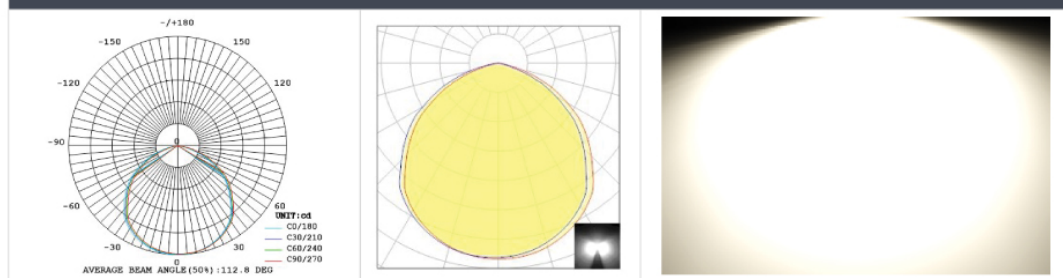


DIMENSIONAL DRAWINGS


FL-UFOH HO LED High Bays (100–150 W)

www.finlight.fi

FL-UFOH

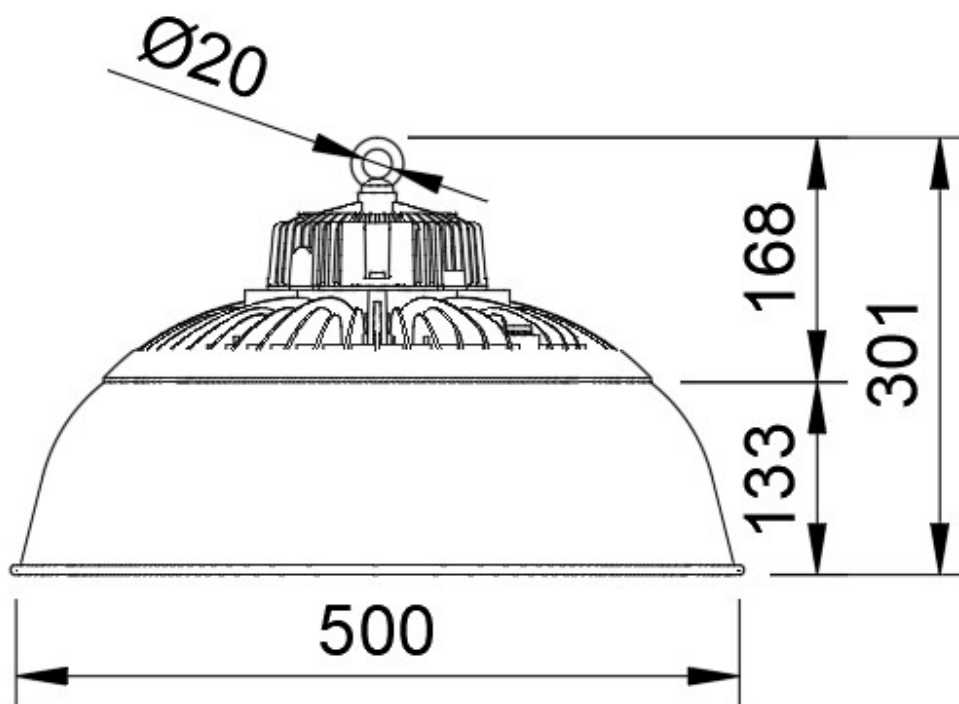

Mittakuva UFOH HO100-150W

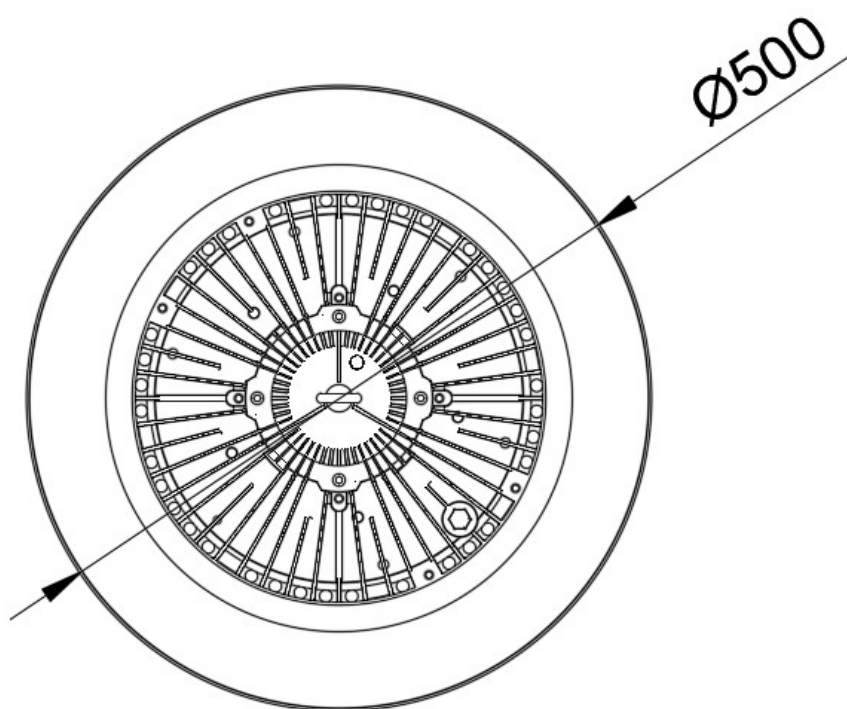

Mittakuva 2 UFOH HO 150W