

PRODUCT INFORMATION

Yksityinen: FL-TBL-2 LED Luminaire

www.finlight.fi

FL-TBL-2



Type: Tubular LED Luminaire

Installation: Surface mounting / suspended

Application: For special conditions such as extreme temperature, food industry and agriculture lighting



Product Name	Dimensions (mm)	Power (W)	Luminous Flux*	Energy Efficiency	Weight (kg)
FL-TBL-2 1452 40W	ø75x1452*2	40	6000 lm(@ 840)	150 lm/W	3,0
FL-TBL-2 552 20W	ø75x552*3	20	2599 lm(@ 840)	130 lm/W	3,0

*(+/- 10 %) *2Length without connectors, length with one IPD connector is 1538 mm (1IPD), length with two IPD connectors is 1624 mm (2IPD) *3Length without connectors, length with one IPD connector is 638 mm (1IPD), length with two IPD connectors is 724 mm (2IPD)

MATERIALS

Reflector/Diffuser: Opal polycarbonate / PMMA

Frame material: Stainless steel (316)

Opal polycarbonate diffuser included. For special conditions (hard chemicals) polymethyl methacrylate diffuser (PMMA) available.

DEGREE OF PROTECTION (IP)

IP67

IK10

Phoenix Contact IPD -series connectors for 3/5 x 1,5–2,5 mm² cables. 1 connector (1IPD) / 2 connectors + through wiring (2IPD). Connector length 86 mm.

INFORMATION/INSTALLATION

Availability of the Light Distribution Files: Yes

Mounting: Surface / suspended

Operating Temperature: -40–+60°C

Direct sun impact: +65°C

Warranty: 7 years

Ask for more options!

PRODUCT ORDER CODES

FL-TBL-2 1452 40W

FL-TBL-2 552 20W

Please add the accessory/option codes after the product name. For example, luminaire with through wiring, two IPD connectors and PMMA diffuser: FL-TBL-2 1452 40W 2IPD PMMA

LIGHT SOURCE

CRI (Color Rendering Index): >80

Lifespan: 60 000 h (L90)

TECHNICAL DATA

CCT (Color Temperature Options): 4000 K / 5000 K / 6000 K / 6500 K

Input Voltage: AC220–240V 50/60Hz

ACCESSORIES / OPTIONS

SK – Suspension mounting kit

1IPD – 1 IPD connector without through wiring (connector at one end only)

2IPD – 2 IPD connectors + through wiring (connector at both ends)



PMMA – polymethyl methacrylate diffuser (great chemical resistance)

PRODUCT IMAGES

Yksityinen: FL-TBL-2 LED Luminaire

www.finlight.fi

FL-TBL-2

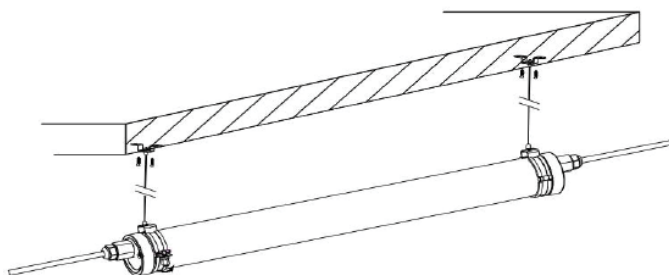
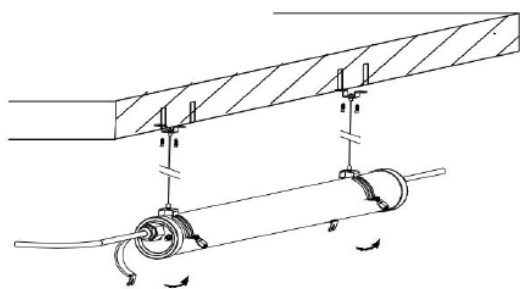


PRODUCT IMAGES

Yksityinen: FL-TBL-2 LED Luminaire

www.finlight.fi

FL-TBL-2

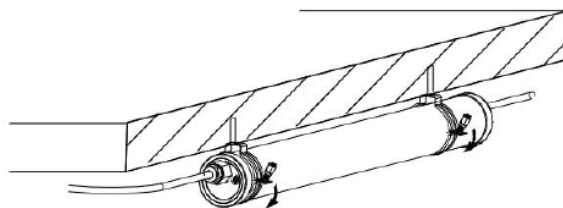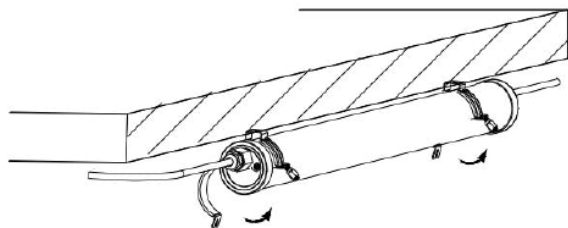

Pinta-asennus

Surface Mounting

DIMENSIONAL DRAWINGS

Yksityinen: FL-TBL-2 LED Luminaire

www.finlight.fi

FL-TBL-2

